

Charger with Type 2 outlet / fixed cable Type 1 or Type 2 for wall installation or stand attachment




Functionalities

- Power from 1,4 to 22 kW, adjustable anytime.
- High visibility LED display.
- Comes with a locking key.

Options

- RFID card lector
- WiFi, you can configure it with you smartphone.
- Integrated protections.
- Integrated meter.
- Home load balancing.
- Load balancing between charging stations.

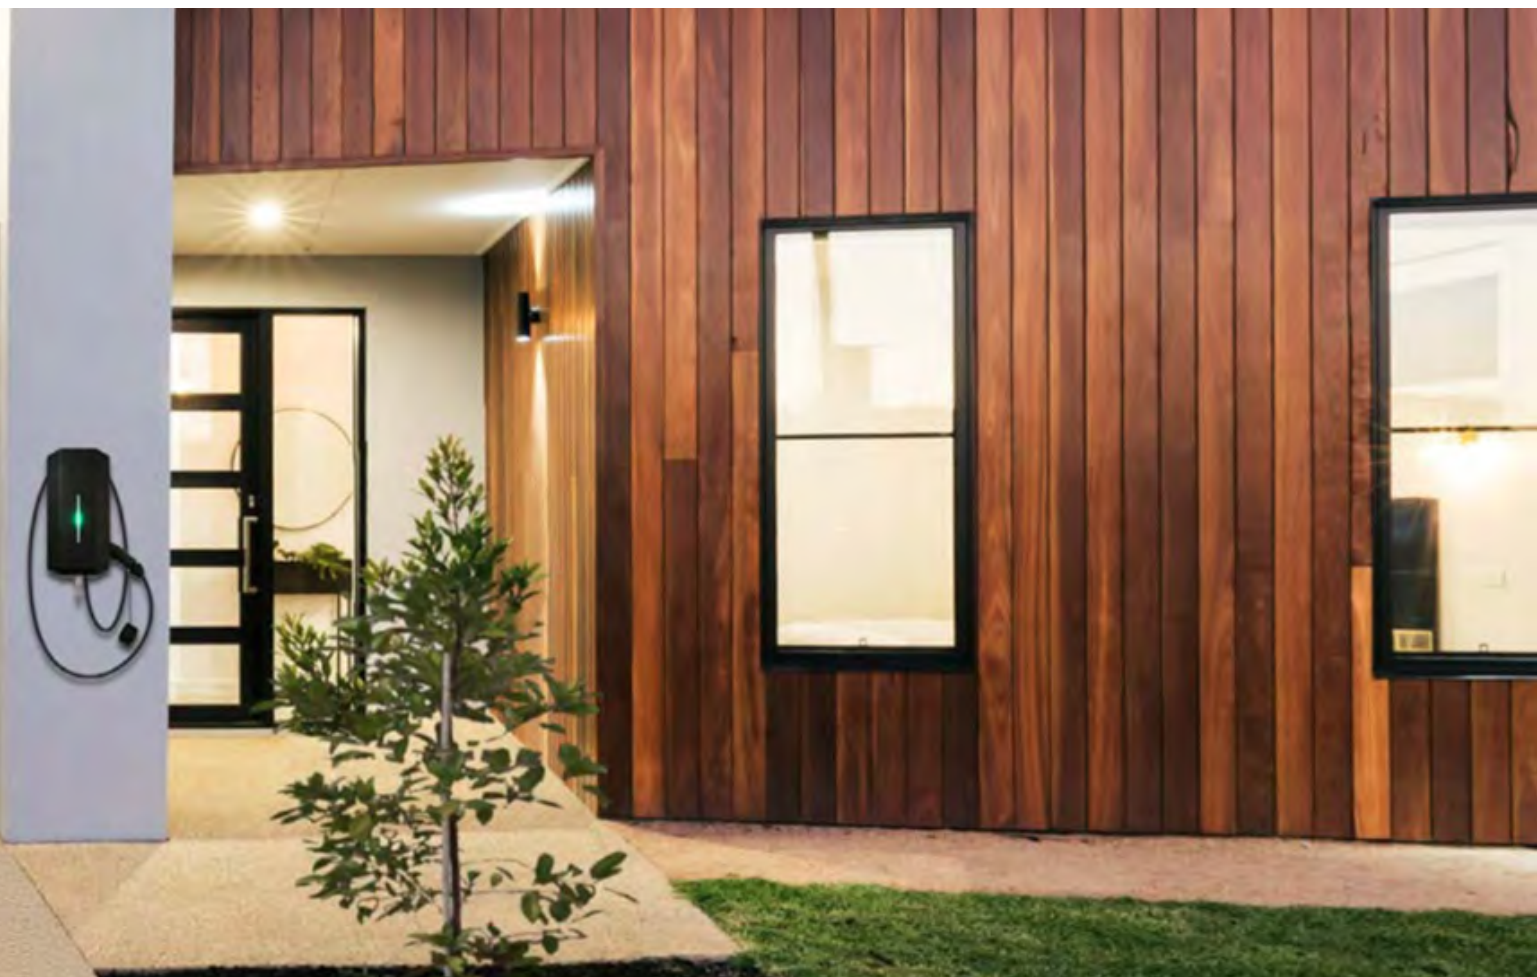

Charger with Type 2 outlet / fixed cable Type 1 or Type 2 for wall installation or stand attachment



Technical data

Specifications

| | |
|-----------------------|--------------------------------|
| Product type: | all GHL models |
| Standards/directives: | IEC 61851-1 and IEC TS 61439-7 |



| | |
|-------------------------------|---|
| Installation: | on wall or on GARO Wallbox stand |
| Voltage rating: | 230V/400 50Hz |
| Installation systems: | TT, TN and IT systems |
| Charging type: | Mode 3 |
| IP classification: | IP44 |
| Mechanical impact resistance: | IK08 |
| Application temperature: | -25°C – +40°C |
| Storage temperature: | -35°C – +55°C |
| Installation height: | 0.5–1.5 metres above ground/land to lower edge of charger |
| Weight: | around 3 kg including socket outlet 3.8–4.1 kg including cable and connector, 1-phase 5.4 kg including cable and connector, 3-phase |
| Cable length: | 5 m (Only GLB models with fixed cables) |